

"Demanded by Those Who Know Quality"

HIGH COUNTRY STRAIGHT SNOW PLOW

STMX1, STMC1, SPMX1, SPMC1, STTT1, SPTT1, STMXTT1, SPMXTT1, STMCTT1, SPMCTT1

STANDARD FEATURES:

5" x 5" x 3/8" HD Square Tube Table, 90" wide Push Frame, and Massive 3-1/2" Round Pivot Bushing

[5] Table to Moldboard Hook-Up Points with 1-1/2" Thick Ribs, 3" Bearing Surface and 1-1/4" Pins


Extended Roll Moldboard Continuously Welded

[2] Telescopic Trip Bars, [6] Extension Trip Springs and [4] 3" Poly Bushings for Return Trip Cushion

7" x 4" x 1/2" Fully Boxed Bottom Angle

Deep "C" A-Frame

[3] Adjustable Pitch Settings

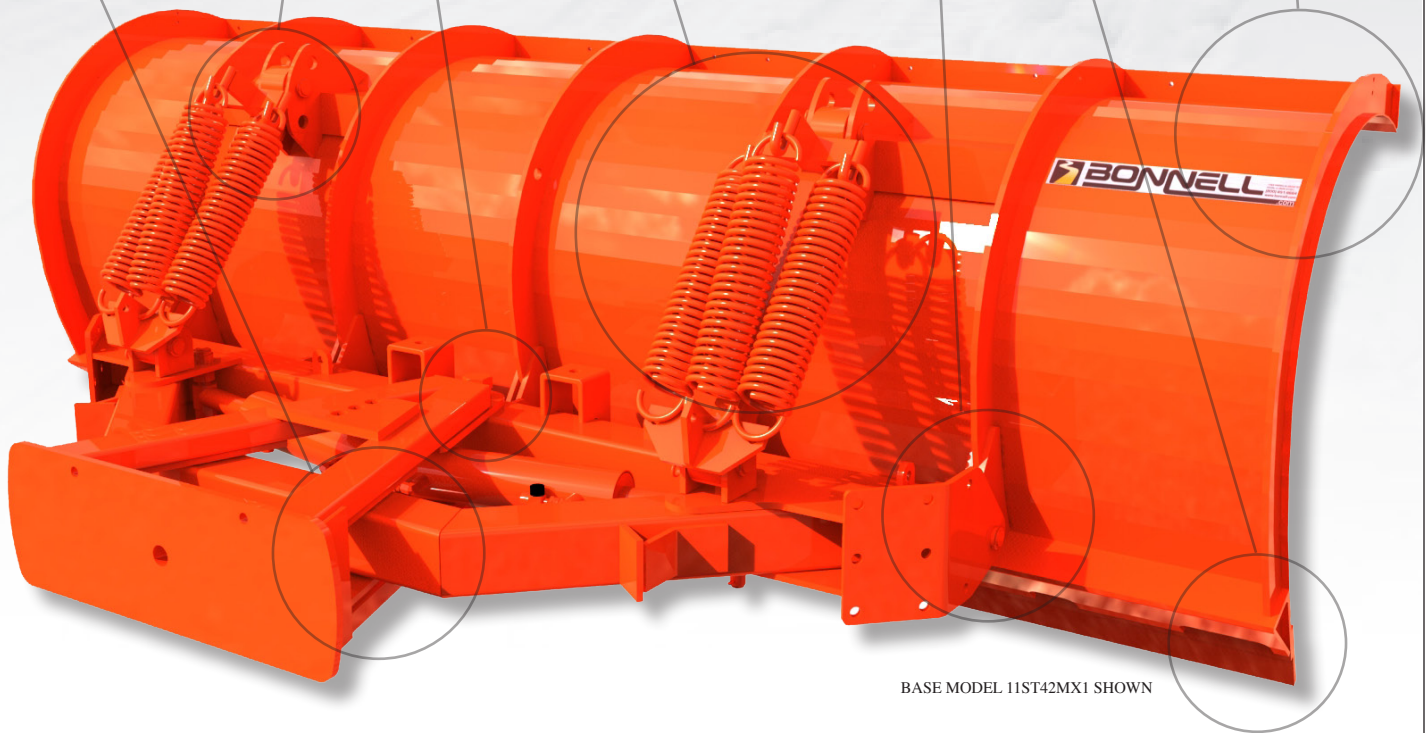

BASE MODEL 11ST42MX1 SHOWN

Bonnell High Country Straight Snow Plows are designed for removing snow at high-speeds in rural areas and interstate highways. The standard extended roll moldboard is designed to move the snow to the discharge end of the plow more efficiently. This prevents the snow from blowing over the top of the plow. This plow produces the same results when plowing to the left or to the right.

Bonnell's many standard features are what set us apart from our competition. These features, outlined above, include the 7" x 4" x 1/2" fully boxed bottom angle which adds strength to keep the moldboard from bending. We also

insert a 3" x 3" poly bushing into the top and bottom of both trip bars to absorb shock from tripping. The poly bushing provides cushion, making hitting an obstruction less intense and safer on the driver, plow, truck and the road.

Plows are available with steel or poly moldboards. Other options are also available [see page 2].

Meeting the demands of Mother Nature in the winter is a tough job. You need a tough plow to get you through the harshest conditions. Bonnell High Country series snow plows will clear the way.

HC Straight Snow Plow Specifications

| MODEL NUMBER | LENGTH | HEIGHT | CUTTING SWATH @ 35 DEGREES | APPROX. WEIGHT | NUMBER OF SPRINGS |
|--------------|--------|--------|----------------------------|----------------|-------------------|
| 10ST36MX1 | 10' 0" | 36" | 8' 2" | 1960 | 4 |
| 11ST36MX1 | 11' 0" | 36" | 9' 0" | 2025 | 4 |
| 12ST36MX1 | 12' 0" | 36" | 9' 10" | 2090 | 4 |
| 10ST42MX1 | 10' 0" | 42" | 8' 2" | 2052 | 6 |
| 11ST42MX1 | 11' 0" | 42" | 9' 0" | 2119 | 6 |
| 12ST42MX1 | 12' 0" | 42" | 9' 10" | 2186 | 6 |
| 10ST49MX1 | 10' 0" | 49" | 8' 2" | 2100 | 6 |
| 11ST49MX1 | 11' 0" | 49" | 9' 0" | 2170 | 6 |
| 12ST49MX1 | 12' 0" | 49" | 9' 10" | 2240 | 6 |
| 11ST60MX1 | 11' 0" | 60" | 9' 0" | 2500 | 8 |
| 12ST60MX1 | 12' 0" | 60" | 9' 10" | 2600 | 8 |

Call factory for complete specifications and optional equipment not listed. Weights do not include optional equipment.

Moldboard Thickness: 10 Gauge

Moldboard Reinforcing: (7) - 1/2" x 3" Ribs

Adjustable Moldboard Pitch Settings: 35°, 25° or 15° off vertical

Lower Reinforcing Angle: 7" x 4" x 1/2"

Reversing Frame: 5" x 1/4" Wall Structural Tubing

Reversing Cylinders: 4" Bore x 12" Stroke (2" Rod) Double Acting


Reversing Limits (left & right): 0 to 35 degrees

Plow to Table Hinge Points: (5) 1-1/4" Hinge Pins, Spanning 90"


Cutting Edge: 5/8" x 6" High Carbon Steel Std. Punch

Pivot Pin: 1-1/2" Grade 8 Bolt

Cylinder Pins: 1-1/4" C1045 Steel Pins

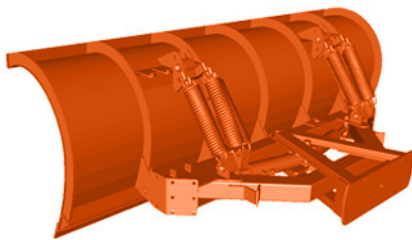


10-Gauge Steel Construction with Extension Springs (STMX1)

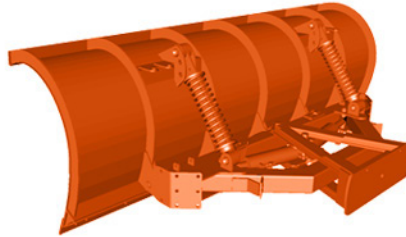

10-Gauge Steel Construction with Compression Springs (STMC1)



UHMW Poly Construction with Extension Springs (SPMX1)

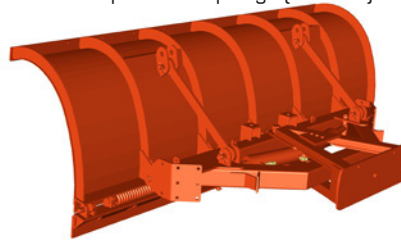

10-Gauge Steel Construction with Torsion Trip (STTT1)

High Country Options

Plow Lift Options

- Chain
- Level Raise Lift System™
- Chain and Saddle
- Cable Wrap



Plow Hook-Up Options

- Quick Attach Loop
- Swivel Bar with Push Ears (1-1/4" pins @ 30.5")
- Husting Style
- Custom Application



Running Gear Options


- Standard-Duty Mushroom Shoes
- Heavy-Duty Mushroom Shoes
- Heavy-Duty Even Wear Shoes
- Carbide Even Wear Shoes
- 10" Steel Caster (Kingpinless) Wheels
- 5.70 x 8.0 Pneumatic Tires*
- Foam-Filled Rubber Tires*

*Should not be used with Cable Wrap Lift Assemblies



Moldboard Options

- 3/4" Bottom Angle
- 7-Gauge Steel Construction
- Curb Cut (Mailbox Cut)
- Extra Ribs
- UHMW Poly Construction
- Special Sizes Available




Tripping Options

- Extension Trip Moldboard
- Compression Trip Moldboard
- Torsion Trip Cutting Edge
- Dual Trip Moldboard & Cutting Edge

Table Options

- Extended Push Frame
- Manual Reverse
- Power Reverse




Cutting Edge Options

- High Carbon Steel
 - Rubber
 - UHMW Poly
 - Carbide Insert with Cover Blade
 - Flame Hardened
 - PolarFlex Systems
- All cutting edges available in various sizes

Other Options

- Cushion Valve
- Curb Shoes
- Blade Savers - Carbide
- Blade Guides
- Rubber Deflector
- Plow Stand
- Nitrited Cylinders
- Extra Extension Trip Springs



Paint Options

- Special Paint Available

Sold By:



1385 Franklin Grove Rd. • Dixon, IL 61021 • www.bonnell.com
(815) 284-3819 • (800) 851-9664 • Fax (815) 284-8815

Bonnell Industries reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein.
© 2006 Bonnell Industries, Inc.

REV010412

