

*“Demanded by Those Who Know Quality”*

# QX HITCH: LOW PROFILE DESIGN

## STANDARD FEATURES:

- Universal dual hook-up: Quick Attach or Swivel Bar Mount
- Fold-up lift arm design
- Compact rigid lift arm with adjustable pick up points
- 4x10 Double acting Nitrided Lift Ram
- Available in HFF, UBF, USP and BTA mounting kit
- Available with QL2 Style quick link receiver



**Fig. 1:** QX Hitch shown in the operating position.

**Fig. 2:** QX Hitch shown in the lowered or stowed position.



Versatility, safety, and easy operation are all features built into the QX Hitch from Bonnell. This heavy duty hitch features an off center lift cylinder for installation with or without a front mount pump, and is designed to allow the lift cylinder to swing up, and the lift arm to fold down when not in use.

The QX Hitch also comes with a QA receiver welded into position, while at the same time allowing for a swivel bar type hook up. This makes it more adaptable to your existing snowplow fleet while keeping the plow as close to the front axle as possible.

Optional mounting kits available:

Custom Side Plate (HFF), Universal Bumper to Frame (UBF), Universal Side Plate (USP) and Bumper to Axle (BTA).

# QX Hitch Specifications

Sturdy 1/2" plow frame uprights, low profile design

Fold-up lift arm with stow away lift cylinder

Side-by-side offset lift arm for use with front mounted pto pump.

1-15/16" greasable lift arm pin.

Heavy duty 1" x 4" lift arm, reinforced with 1/2" plate and 4" x 3" x 3/8" tubing. Lift arm will have 3 hook up holes for optional lift points. Standard Bonnell Quick attach receiver with 2-1/2" diameter steel coupling pin welded into frame

4x10 Double acting Nitrided Lift Ram




### Heavy Front Frame (HFF)

- Custom fit 1/2" thick A-36 side plates (5/8" plate optional)
- Minimum (7) 5/8" Grade 8 bolts & lock nuts per side
- Easy to install tow hook-holes are pre-drilled



### Universal Bumper to Frame (UBF)

- Heavy duty 1" x 4" push arms
- Universal frame mount Z-Iron brackets

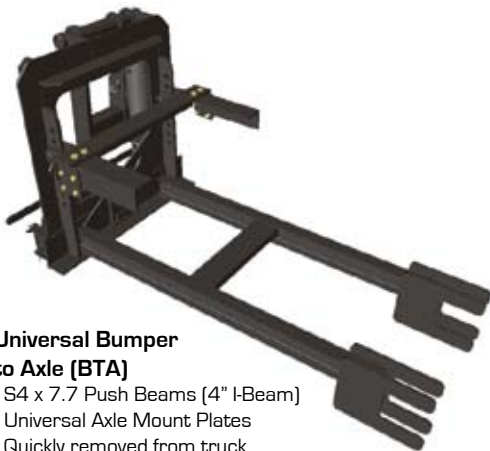

### Universal Bumper to Axle (BTA)

- S4 x 7.7 Push Beams (4" I-Beam)
- Universal Axle Mount Plates
- Quickly removed from truck with the pull of two pins



### Universal Side Plate (USP)

- Heavy duty universal 5/8" side plates
- Universal frame mount Z-Iron brackets

Sold By:



1385 Franklin Grove Rd. • Dixon, IL 61021 • www.bonnell.com  
 (815) 284-3819 • (800) 851-9664 • Fax (815) 284-8815

Bonnell Industries reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein.  
 © 2006 Bonnell Industries, Inc.

REV020109

# Options



Blade Xaver: Reduce Blade Down Pressure By Approx. 600 LBS



Light Bar: Fold Over Style



QLX Hitch: For a QL2 Style Hook-up



Telescopic Lift Arm

