MTR - SERIES

MID-CONVEYOR. TWIN AUGER. REAR DISCHARGE.

FEATURES & BENEFITS:

- 1. Available in a variety of carbon and stainless steel materials for cost effectiveness, corrosion resistance and durability.
- 2. Twin opposing 7" hard-faced multi-pitched augers evenly unload material from inside the dump body.
- Auger design prevents material from contaminating the underside of the truck's chassis.
- 4 Standard galvanized top screen keeps large chunks of material from being loaded into the dump body.
- 5 Removable auger pan ensures damage-free protection during the off-season.
- 6 Prism-shaped, tapered body design allows compacted and irregularly-shaped material to exit the rear of the dump body without lodging.

- 6-panel tailgate with 1-1/2" diameter stainless steelpivot and locking pins for superior strength and corrosion resistance.
- 8. Manifold grease system ensures all critical wear points are serviced.
- Central conveying system allows the Commander dump body to safely remain on the truck chassis during operation.
- 10. Twin hydraulic motor and planetary gearbox combination provides optimum torque to power the augers through the toughest unloading conditions.
- 11. Stainless steel corner post and tailgate trip mechanism is standard on carbon steel models to provide additional corrosion resistance.
- 12. Tailgate is locked in place with twin pneumatic cylinfers and over-center latch mechanisms to ensure trouble-free operation.



CAPACITY SPECIFICATIONS

MODEL NUMBER	BODY LENGTH	MINIMUM TRUCK CHASSIS REQUIREMENT	STRUCK SIDE WALL CAPACITY	STRUCK TAILGATE CAPACITY*	HEAPED BOX CAPACITY*	MAXIMUM LIQUID CAPACITY
MTR09	9′	72"C/A	6.1 yd ³	7.9 yd ³	9.3 yd ³	250 gal
MTR10	10′	84"C/A	6.9 yd ³	8.8 yd ³	10.4 yd ³	300 gal
MTR11	11′	96" C/A	7.7 yd ³	9.8 yd ³	11.6 yd ³	300 gal
MTR12	12′	108" C/A	8.5 yd ³	10.8 yd ³	12.8 yd ³	540 gal
MTR13	13′	96" C/T	9.3 yd ³	11.8 yd ³	14.1 yd³	540 gal
MTR14	14′	108" C/T	10.1 yd ³	12.8 yd ³	15.3 yd ³	540 gal
MTR15	15' - 2"	120" C/T	10.9 yd ³	13.8 yd ³	16.4 yd³	540 gal
MTR16	16' - 2"	132" C/T	11.7 yd³	14.7 yd³	17.5 yd³	540 gal

* With Side Boards


BODY DIMENSIONS

Bulkhead height	.50 ½"
Inside body width	87"
Long sill height	.14 ½"
Side wall height	.40 ½"
Tailgate height	.49 ½"

BODY CONSTRUCTION

Bulkhead 7 gauge
Floor 7 gauge
Long sill1/4'
Side wall 7 gauge
Tailgate7 gauge

TWIN AUGER BOTTOM




OPTIONAL ACCESSORIES

- 1. Air foil
- 2. Auger pan winter cover
- Cab shield
- 4 Fenders- poly or metal
- 5 Light packages
- 6. Motor feedback sensor
- Poly tank pre-wet system
- Rear material spreader
- 9. Rear spill pan
- 10 Observation ladder
- 11) Side boards- wood or metal
- 12. Summer replacement floor
- 13. Tarp kit
- 14. Vibrator
- 15. Hoist kit



18. Body riser kit

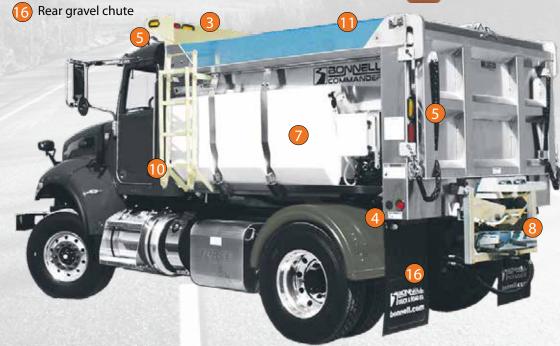



www.bonnell.com • (800) 851-9664 • info@bonnell.com 1385 Franklin Grove Rd. • Dixon, IL 61021









